

PUNTEO®-P155



PUNTEO®-P155

Powerful LED environmental light

PUNTEO®-P155 environmental lights are equipped with LED technology and provide brilliant trends. With its integrated environmental control system, PUNTEO®-P155 can support the relevant prevalent lighting atmosphere [During the day: Light with a cold light colour. At night: Light with a warmer light colour].

Technical details


Article number:	PUN P155-036W3-01	PUN P155-036W4-01	PUN P155-036W0-01
Supplied voltage:	6x6 W	6x6 W	each with 3x6 W
Lighting:	2550lm 3000K RA 85	2910lm 4000K RA 85	1275lm 3000K RA85 1470lm 5000K RA 85
LED:	Screwed array		
Efficiency:	75%		
Light technology:	Symmetric, wide angle beam		
Material:	Anodised aluminium, silky matt		
Installation height:	125 mm		
Ceiling opening:	Ø 145 mm		
Power supply located in the ceiling void			

Benefits

- Heat is not radiated into the room, but into the ceiling void
- High efficiency and high light output through increased area due to conical LED receptacle
- Dimmable and economic spotlighting

durlum GmbH
An der Wiese 5
D-79650 Schopfheim

T +49 (0) 76 22 | 39 05-0
F +49 (0) 76 22 | 39 05-42
E info@durlum.com
I www.durlum.com

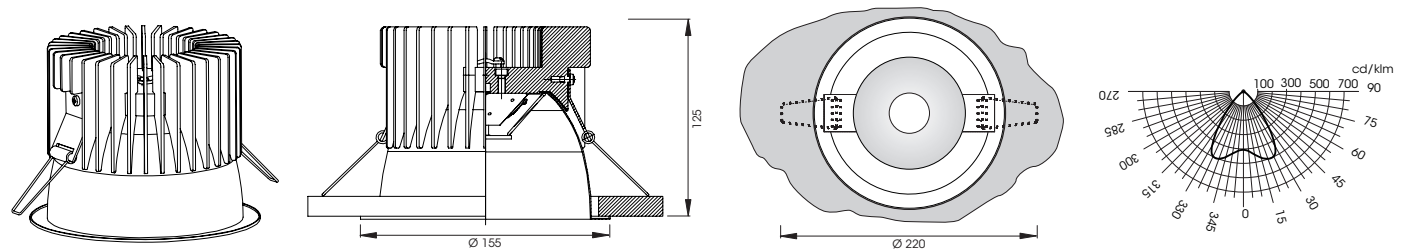

Preliminary technical details. Changes to measurements and design reserved. Errors and omissions excepted. All rights reserved. Updated 12|2010.