

TALILUX®



TALILUX®

Architectural lighting system

Equipped with innovative LED technology, TALILUX® meets all of the requirements of modern architecture. With its style TALILUX® captivates with elegant and simple design and radiates both downwards and to the sides [optionally only downwards]. Dynamic lighting colour control can be integrated. The dimensions of the complete profile are 40x80mm, and those of the illuminating portion 40x40mm.

TALILUX® can be optimally integrated into the durlum ceiling systems, especially into the durlum POLYLAM blade ceiling.

Benefits


- Even lighting, dynamic colour control
- Gradually variable lighting, variable light length
- Low maintenance
- Easy installation

durlum GmbH
An der Wiese 5
D-79650 Schopfheim

T +49 (0) 76 22 | 39 05-0
F +49 (0) 76 22 | 39 05-42
E info@durlum.com
I www.durlum.com



Sample application | Ceiling Light Integration

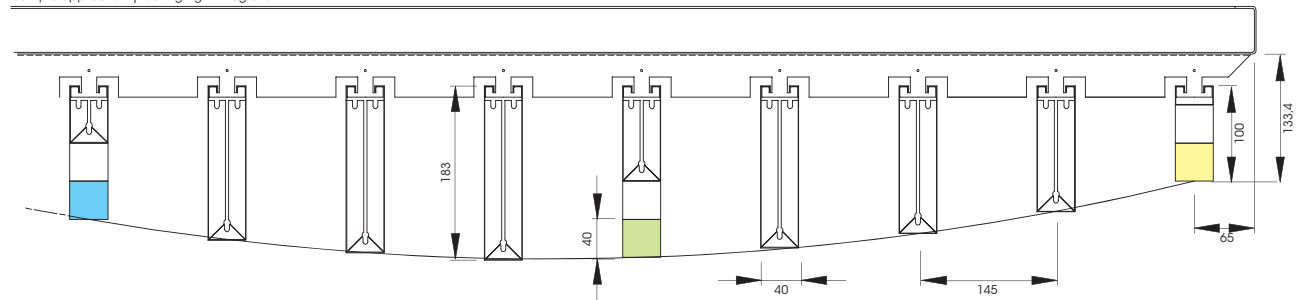

Preliminary technical details. Changes to measurements and design reserved. Errors and omissions excepted. All rights reserved. Updated 12|2010.